

*Complement  
your purchase  
with these  
fine accessories  
also from  
GINGER®:*

*Towel Bars  
Towel Rings  
Toilet Tissue Holders  
Hooks  
Soap Dishes  
Tumbler Holders  
Toiletry Shelves  
Grab Bars  
Mirrors  
Lights  
Bud Vases  
Hotel Shelves  
Shower Curtain Rods  
Soap & Bottle Baskets  
Cabinet Hardware*

# LIGHT

WITH NIGHT LIGHT FEATURE

## INSTALLATION INSTRUCTIONS

*for*  
Quattro

GINGER®

2001 CARNEGIE AVE. SANTA ANA CA 92705  
WWW.GINGERCO.COM

GNG-M1881N 11-15-18  
EN-3748  
REV -

GINGER®

# GINGER®


## LIGHT

Model

#M1881N

Wall Mount

Only

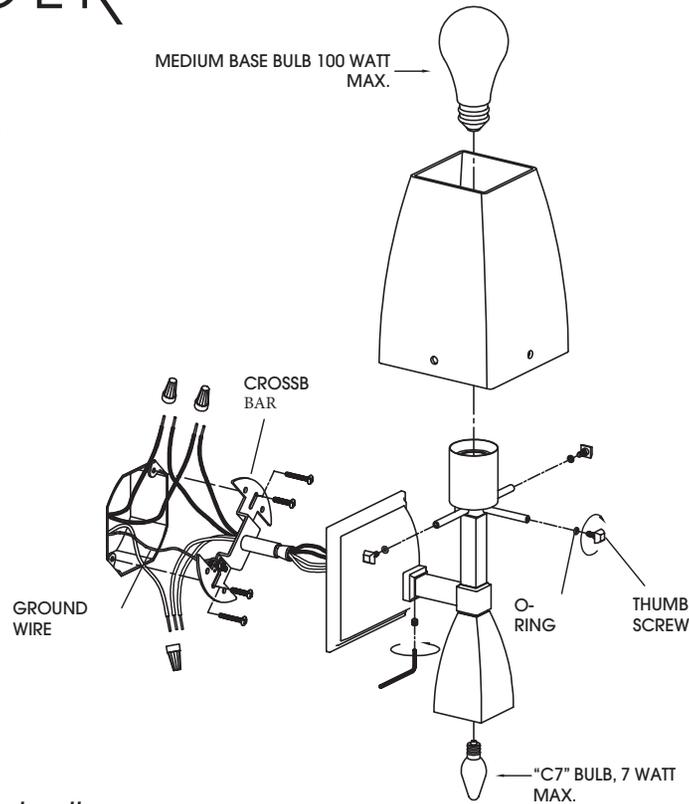

### Installation Instructions:

These lights should be installed by a licensed electrical contractor.

**POWER REQUIREMENTS:** 120 Volts, 60 Cycles

**WIRING REQUIREMENTS:** This device can be operated with either single or double switches. The double switch would be used to enable operation of the top light and bottom light separately.

**Single Switch:** 2 conductor wire with ground.

**Double Switch:** 3 conductor wire with ground.

**SAFETY: TO PREVENT ELECTRICAL SHOCK, BE SURE THAT POWER IS OFF BEFORE STARTING INSTALLATION.**

### **INSTALLATION:**

1. Provide the required wiring to the wall-mounted electrical box. The electrical box should be flush in the wall.
2. Mount crossbar to the electrical box. The crossbar should be flat against the wall with the spindle facing away from the wall.
3. Connect house ground wire to the crossbar with the attached ground screw.
4. Feed the light fixture wires through the center hole of the crossbar.
5. Connect the white wires of the fixture to the house neutral wire with a wirenut.
6. **A: FOR SINGLE SWITCH:**  
Connect the red wire and black wire of the fixture to the house hot wire with a wirenut.  
**B: FOR DOUBLE SWITCH:**  
Connect the black wire of the fixture to the house hot wire for the main light, then connect the red wire of the fixture to the house hot wire for the night light.
7. Slide the fixture over the spindle of the crossbar until it is flush against the wall. Secure the fixture by tightening the set screw on the bottom side of the post with the provided wrench. Make sure the wires are not pinched during this process.
8. Position glass shade over spokes on fixture.
9. Place O-Ring onto thumbscrews and tighten into threaded holes in spoke. Do not over tighten.
10. Install bulbs.